



Accura[®] 48HTR

A strong, rigid and translucent SLA plastic for applications that require high-heat resistance.

High Temperature Class Stereolithography (SLA)

HIGH PERFORMANCE AT HIGH TEMPERATURE

Accura 48 HTR is a rigid and stiff plastic material for applications that require high-heat resistance, ideal for automotive, aerospace and electronic components testing up to 130 °C/266 °F. Material transparency allows for visualization of internal structures in assemblies and fluid flow analysis.

Offering long term stable properties and chemicals resistance, it is ideal for under-the-hood component testing.

APPLICATIONS

- Thermally resistant transparent prototypes
 - Hot or coolant fluid flow visualization
 - HVAC components
 - Under the hood testing
 - Internal structures visualization
 - Electronic controls prototypes
 - Wind tunnel models

BENEFITS

- Suitable for high temperature testing
- Translucent parts
- Stable mechanical properties over time
- Parts are strong and maintain shape
- Fast recoating and cleaning

FEATURES


- Temperature resistant up to 130 °C (266 °F)
- Rigid and stiff
- Resistant to common automotive fluids/oils
- Low viscosity formulation

Liquid Material

MEASUREMENT	CONDITION	VALUE
Viscosity	@ 30 °C (86 °F)	200-250 cps
Penetration Depth (Dp)		5.5 mils
Critical Exposure (Ec)		7.4 mJ/cm ²
Color		ClearAmber
Liquid Density	@ 25 °C (77 °F)	1.17 g/cm ³ 0.04 lbs/in ³

Printer Compatibility/Packaging:

ProJet [®] 6000/7000 SLA printers:	2L cartridge
ProX [®] 800/950, iPro [™] 8000/9000 SLA printers:	10 kg cartridge
Viper si2 [™] and SLA 5000 printers:	10 kg standard bottle

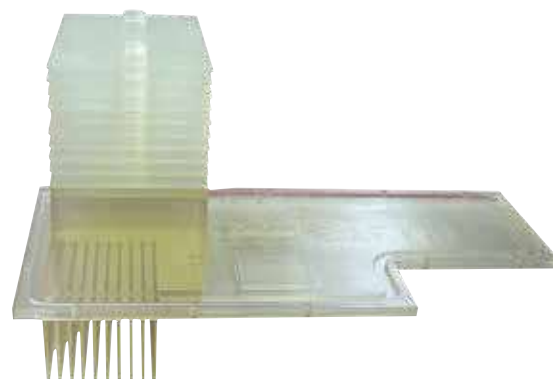

Accura[®] 48HTR

A strong and rigid SLA plastic for applications that require high-heat resistance.

High Temperature Class
Stereolithography (SLA)

Post-Cured Material

MECHANICAL PROPERTIES		LARGE FRAME SLA PRINTERS				PROJET SLA PRINTERS¹	
MEASUREMENT	CONDITION	METRIC (PCA ONLY)	METRIC (THERMAL PC¹)	U.S. (PCA ONLY)	U.S. (THERMAL PC¹)	METRIC	U.S.
Tensile Strength (MPa PSI)	ASTM D 638	64-67		9280-9720		66	9570
Tensile Modulus (MPa KSI)	ASTM D 638	2800-3980		406-577		3390	492
Elongation at Break	ASTM D 638	4-7 %				6 %	
Flexural Strength (MPa PSI)	ASTM D 790	105-118		15200-17100		112	16240
Flexural Modulus (MPa KSI)	ASTM D 790	2760-3400		400-493		3080	490
Impact Strength (J/m Ft-lbs/in)	ASTM D 256	22-29		0.4-0.5		26	0.5
Heat Deflection Temperature @ 0.45 MPa (66 PSI) @ 1.82 MPa (264 PSI)	ASTM D 648	65 °C 57 °C	130 °C 110 °C	149 °F 135 °F	266 °F 230 °F	65 / 130² °C 57 / 110² °C	149 / 266² °F 135 / 230² °F
Coefficient of Thermal Expansion (CTE) (µm/m-°C / µm/in-°F)	ASTM E 831-93 TMA (T<Tg, < 50 °C) TMA (T<Tg, 9 > 120 °C)	115 165		64 92		NA NA	NA NA
Glass Transition (Tg)	DMA, E''	91-100 °C	132-136 °C	195-212 °F	270-277 °F	62 / 132² °C	144 / 270² °F
Hardness, Shore D		86				86	
Solid Density (g/cm³ lbs/in³)	@ 25 °C (77 °F)	1.23		0.044		1.23	0.044

¹ Accura 48HTR was also previously marketed under the VisiJet[®] SL HiTemp name for the ProJet 6000 and 7000 printers

² After thermal postcure 2 hours at 160 °C



3D SYSTEMS[®]
www.3dsystems.com

Warranty/Disclaimer: The performance characteristics of these products may vary according to product application, operating conditions, or with end use. 3D Systems makes no warranties of any type, express or implied, including, but not limited to, the warranties of merchantability or fitness for a particular use.

© 2018 by 3D Systems, Inc. All rights reserved. Specifications subject to change without notice. 3D Systems, the 3D Systems logo, ProX, Accura, ProJet and VisiJet are registered trademarks of 3D Systems, Inc.